

ADDENDUM NO. 4

Dated: June 23, 2016

LAFAYETTE BOULEVARD STREETSCAPE IMPROVEMENTS

Except as may be otherwise described, bidding requirements, materials, and workmanship for the work described herein shall conform to all requirements of the original Contract Documents. The following Addendum to the drawings and specifications are made a part of the project and takes precedence over the section of the specifications, in part, and/or drawings, as originally written.

This Addendum consists of two (2) pages.

<u>ITEM NO.</u>	<u>DESCRIPTION</u>
------------------------	---------------------------

1.	DRAWINGS
-----------	-----------------

SHEET LP-9.0- LANDSCAPE PLAN


Remove: CITY OF NORFOLK LANDSCAPE NOTES, Note #4.

Remove: TYPICAL TREE PLANTING DETAIL in its entirety.

Add: TYPICAL TREE PLANTING DETAIL from this Addendum.

2.	Receipt of this addendum shall be acknowledged on page 1.3-1 of the Bid Form
-----------	--

Issued by: Gayle Johnson
 Administrative Assistant

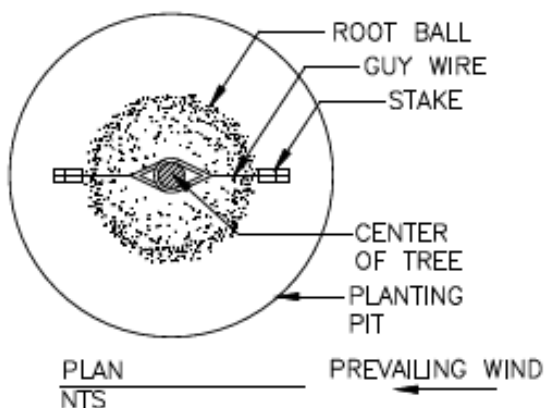

2"x2"x8' HARDWOOD STAKE
DRIVEN 18" BELOW GRADE 2
OR 3 STAKES PER TREE
SPACED OPPOSITE.

HARDWOOD BARK MULCH,
3" DEPTH. DO NOT PLACE
MULCH WITHIN 2" OF
TRUNK.

3" HIGH SAUCER


BACKFILL WILL BE
SPECIFIED PLANTING SOIL

REMOVE ALL TWINE,
ROPE, WIRE, &
BURLAP FROM TOP
1/2 OF ROOT BALL

~~SPECIFIED PLANTING~~ EXISTING SOIL

IF TREE IS SHIPPED WITH A WIRE
BASKET, CUT THE BASKET IN MIN.
OF 4 PLACES & FOLD DOWN OR
REMOVE IN PLANTING HOLE

FIRM SOIL BELOW
ROOT BALL

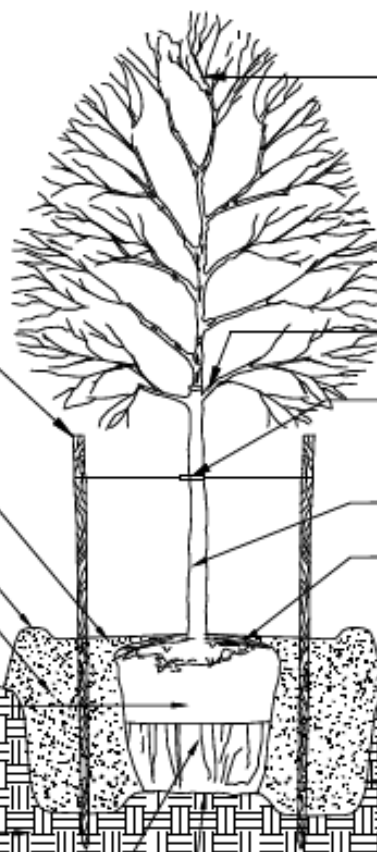

PRUNE INTERFERING,
CROWDED, BROKEN,
CO-DOMINANT LEADERS
OR LOW BRANCHES TO
THE BRANCH COLLAR.
DO NOT TOP TREE

BRANCH HEIGHT
(A.A.N. STANDARD)

RUBBER HOSE SECURED
W/NO. 12 GA. PLIABLE
GALVANIZED WIRE.

DO NOT WRAP TREE TRUNK

ALL TREES SHALL BE PLANTED
1-2" MIN. ABOVE ADJACENT
GRADES IN HEAVY SOIL TO
ALLOW FOR DRAINAGE AND SOIL
SETTLEMENT. NO SOIL SHALL BE
PLACED ABOVE THE ROOT
COLLAR.

SCARIFY WALLS
OF PLANT PITS

12"
MIN.

MIN. OF 12" BETWEEN
ROOT BALL AND
WALLS OF PLANT PIT

TYPICAL TREE PLANTING DETAIL

NOT TO SCALE